



We enlight your dreams

LED MAGNETIC LIGHTS


—SERIES—




LED MAGNETIC LIGHTS




LED MAGNETIC LIGHTS

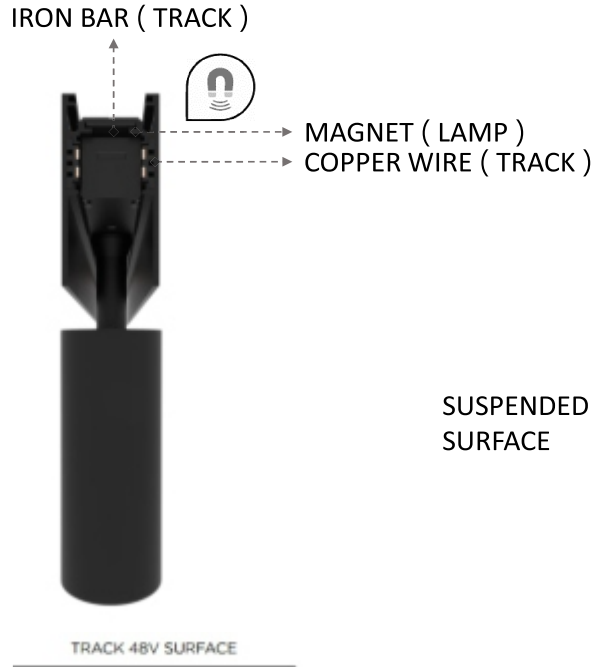

SUSPENDED
SURFACE



RECESSED



LED MAGNETIC LIGHTS

INPUT MODULE



STRAIGHT CONNECT MODULE



CORNER CONNECT MODULE



Line colors

In put



+ DC48V




- DC48V



+ 0-10V/ + DALI



- 0-10V/ - DALI



AC IN PUT

PUSH

INPUT MODULE

PUSH

STRAIGHT CONNECT MODULE

PUSH

CORNER CONNECT MODULE

MAGNET TRACK


MAGNET TRACK

MAGNET TRACK


LED MAGNETIC LIGHTS

◆ REGULAR MODE


◆ BLUETOOTH MODE

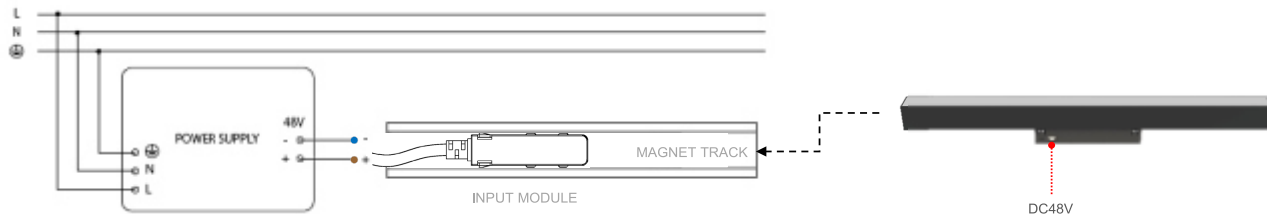

◆ DALI CONTROL

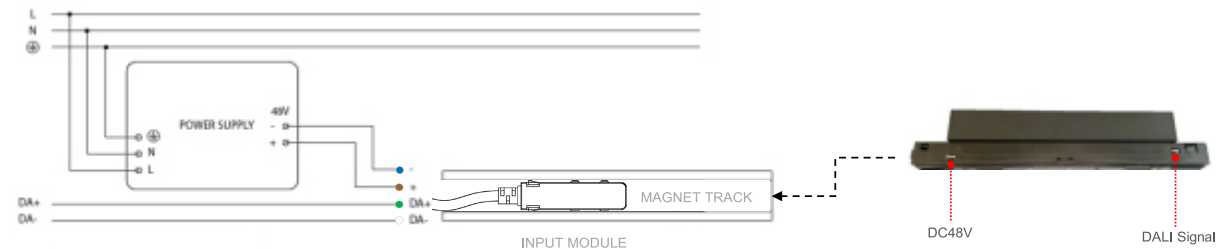


◆ 0-10V CONTROL

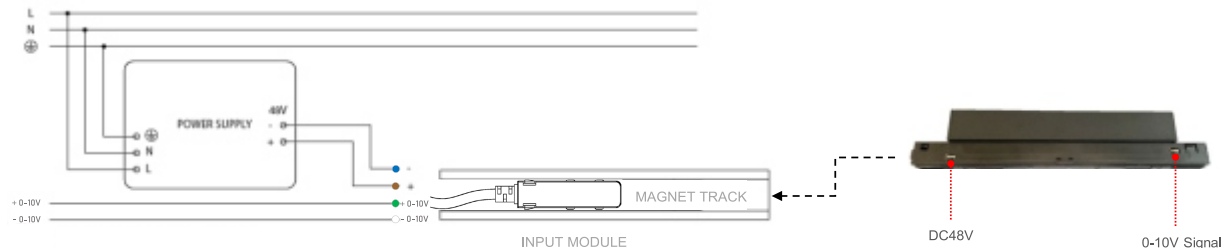

LED MAGNETIC LIGHTS

SMART LIGHT SYSTEM





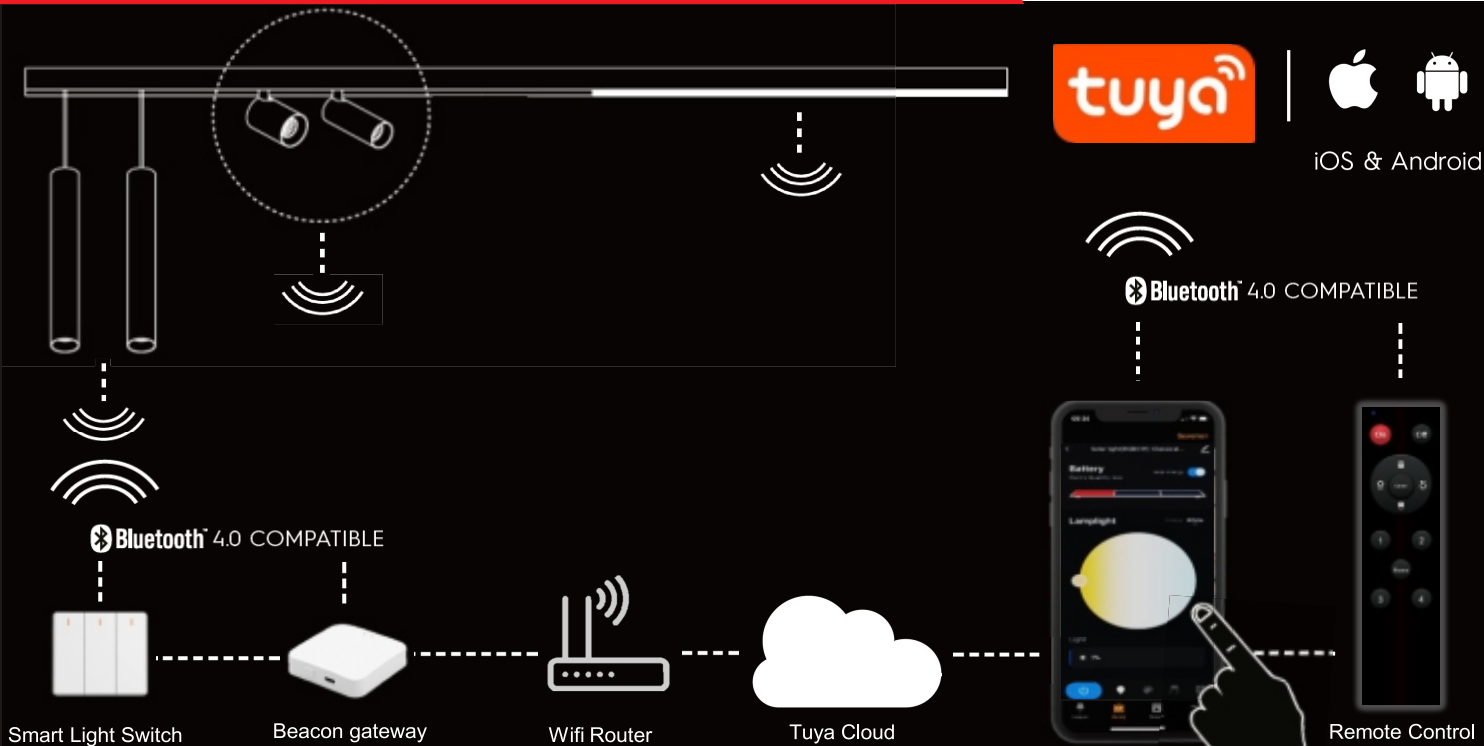


LED MAGNETIC LIGHTS

HOME USE



48V MAGNETIC TRACK

—SERIES—

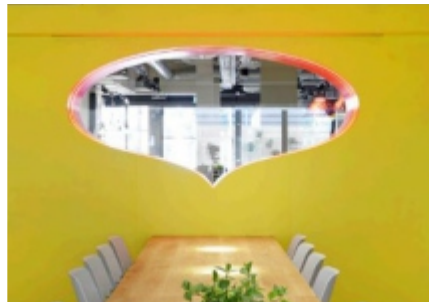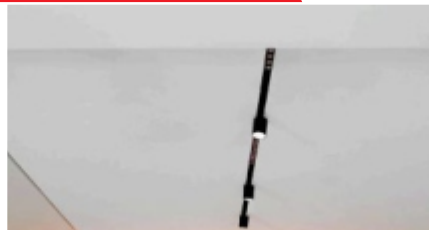


LED MAGNETIC LIGHTS

20TRACK SERIE-TC20



Installation: Recessed

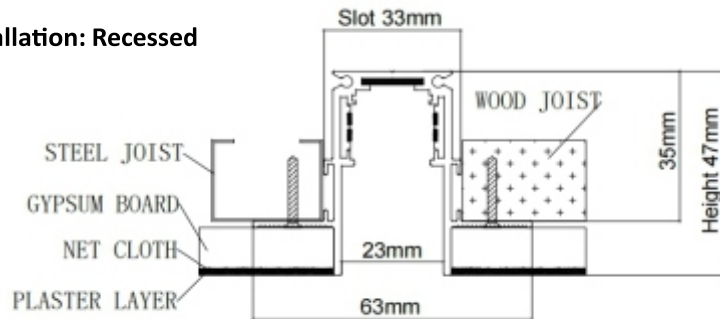

TC20 Corners

Thickness

1.8mm

Weight

1.1kg

Standard
Length

1000mm


2000mm

3000mm


END CAPS



90° corner
(C TO C)




90° corner IN
(C TO W)



LED MAGNETIC LIGHTS



20TRACK SERIE-TH20



Installation:

SURFACE

SUSPENDED

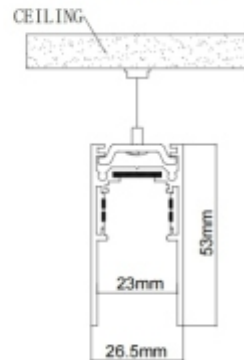

TH20 Corners

Thickness

1.8mm

Weight

0.9kg


Standard
Length

1000mm


2000mm

3000mm


END CAPS



**90° corner
(C TO C)**



**90° corner IN
(C TO W)**





LED MAGNETIC LIGHTS

Magnetic LED Spot Linear



Types



◆SP4 ◆SP8

Code	Power	Size (mm)	Colours
SP4	8W	110*22*42	 (default black)
SP8	16W	218*22*42	

Beam angle : ☐ 15° ☒ 30° ☐ 50°CCT : ☐ 3000K ☐ 4000K ☐ 5000K ☐ 3000-5000KCRI : ≥ 92

Input Voltage : 48VDC




Structure : ☐ Adjustable ☒ FixedAmbient Temperature : $-20^{\circ}\text{C} \sim +40^{\circ}\text{C}$ Dimm/Control : ☐ 0-10V ☐ Dali ☐ Bluetooth ☐ Zigbee

LED MAGNETIC LIGHTS

Magnetic LED Spot Linear



Types



◆LBR6 ◆LBR12 ◆LBR18

Code	Power	Size (mm)	Colours
LBR6	6W	132*22*42	
LBR12	12W	246*22*42	

Beam angle : 30°

CCT :  3000K  4000K  5000K  3000-5000K

CRI : ≥ 92


Input Voltage : 48VDC

Structure : ☒ Adjustable ☐ Fixed



Ambient Temperature : -20°C ~ +40°C

Dimm/Control : ☐ 0-10V ☐ Dali ☐ Bluetooth ☐ Zigbee

Magnetic LED Spot Linear



Types



◆FD6X ◆FD12X◆FD18X

Code	Power	Size (mm)	Colours
FD6X	6W	118*22*84	●
FD12X	12W	226*22*84	

Beam angle : ■ 24° □ 36°

CCT : ● 3000K ● 4000K ● 5000K ● 3000-5000K

CRI : ≥ 92

Input Voltage : 48VDC


Structure : ■ Adjustable □ Fixed

Ambient Temperature : -20°C ~ +40°C


Dimm/Control : □ 0-10V □ Dali □ Bluetooth □ Zigbee



Magnetic LED Diffused Linear



Types

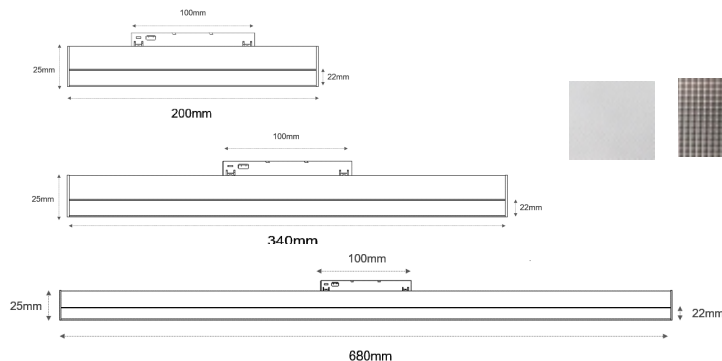

◆DF200 ◆DF340 ◆DF680

Code	Power	Size (mm)	Colours
DF200	6W	200*22*25	
DF340	12W	340*22*25	
DF680	24W	680*22*25	

Beam angle : 105°

CCT :  3000K  4000K  5000K  3000-5000K

CRI : ≥ 92

Input Voltage : 48VDC

Structure : ☐ Adjustable ☒ Fixed


Ambient Temperature : -20°C ~ +40°C

Dimm/Control : ☐ 0-10V ☐ Dali ☐ Bluetooth ☐ Zigbee

Magnetic LED Spot Linear



Types



172mm



341mm

◆LB10 ◆LB20

Code	Power	Size (mm)	Colours
LB10	6W	172*22*25	
LB20	12W	341*22*25	

Beam angle : 30°

CCT :  3000K  4000K  5000K  3000-5000K

CRI : ≥ 92

Input Voltage : 48VDC

Structure : ☐ Adjustable ☒ Fixed


Ambient Temperature : -20°C ~ +40°C

Dimm/Control : ☐ 0-10V ☐ Dali ☐ Bluetooth ☐ Zigbee

Magnetic LED Spot Linear



Types



◆TL5 ◆TL7

Code	Power	Size (mm)	Colours
TL7	7W	φ36*90*125	

Beam angle : 24°

CCT :  3000K  4000K  5000K  3000-5000K

CRI : ≥ 92

Input Voltage : 48VDC

Structure : ☒ Adjustable ☐ Fixed


Ambient Temperature : -20°C ~ +40°C

Dimm/Control : ☐ 0-10V ☐ Dali ☐ Bluetooth ☐ Zigbee

Magnetic LED Spot Linear



Types



◆TL9 ◆TL12

Code	Power	Size (mm)	Colours
TL12	12W	φ48*150*185	

Beam angle : 24°

CCT :  3000K  4000K  5000K  3000-5000K

CRI : ≥ 92

Input Voltage : 48VDC

Structure : ☒ Adjustable ☐ Fixed



Ambient Temperature : -20°C ~ +40°C

Dimm/Control : ☐ 0-10V ☐ Dali ☐ Bluetooth ☐ Zigbee

Magnetic LED Spot Linear



Types



◆RS6 ◆RS9

Code	Power	Size (mm)	Colours
RS6	12W	φ90*36	
RS9	18W	φ116*36	

Beam angle : 30°

CCT :  3000K  4000K  5000K  3000-5000K

CRI : ≥ 92

Input Voltage : 48VDC

Structure : ☒ Adjustable ☐ Fixed

Ambient Temperature : -20°C ~ +40°C

Dimm/Control : ☐ 0-10V ☐ Dali ☐ Bluetooth ☐ Zigbee

Magnetic LED Spot Linear



◆ TB7W

Code	Power	Size (mm)	Colours
TB7W	7W	∅54*290	

Beam angle : 90°

CCT :  3000K  4000K  5000K  3000-5000K

CRI : ≥ 92

Input Voltage : 48VDC

Structure : ☐ Adjustable ☒ Fixed

Ambient Temperature : -20°C ~ +40°C

Dimm/Control : ☐ 0-10V ☐ Dali ☐ Bluetooth ☐ Zigbee

Magnetic LED Spot Linear



◆HG9W

Code	Power	Size (mm)	Colours
HG9W	9W	φ54*290	

Beam angle : 24°

CCT :  3000K  4000K  5000K  3000-5000K

CRI : ≥ 92

Input Voltage : 48VDC

Structure : ☐ Adjustable ☒ Fixed

Ambient Temperature : -20°C ~ +40°C

Dimm/Control : ☐ 0-10V ☐ Dali ☐ Bluetooth ☐ Zigbee

Magnetic LED Diffused Linear



◆ MN25

Code	Power	Size (mm)
MN25	24W	φ250

Beam angle : 340°

CCT : ☐ 3000K ☐ 4000K

CRI : >80

Input Voltage : 48VDC


Structure : ☐ Adjustable ■ Fixed

Ambient Temperature : -20°C ~ +40°C

Dimm/Control : ☐ 0-10V ☐ Dali ☐ Bluetooth ☐ Zigbee




Estimate

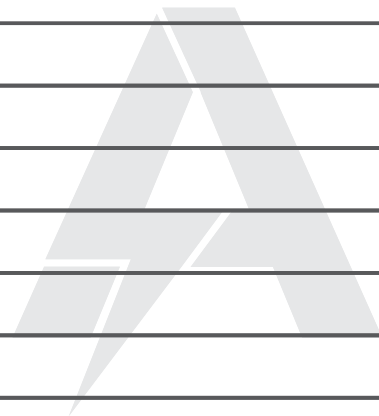

AKSH LIGHTS

I N D I A


Estimate

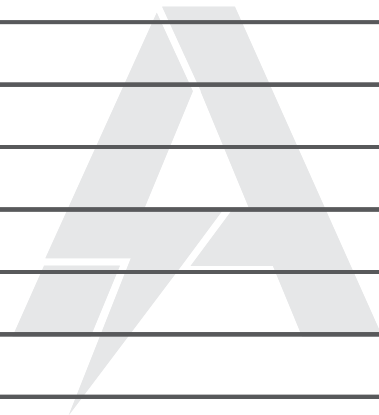

AKSH LIGHTS

I N D I A

Estimate

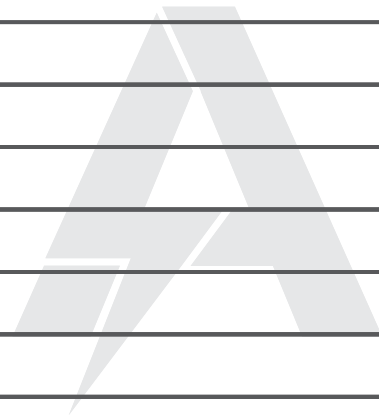

AKSH LIGHTS

I N D I A



AKSH LIGHTS INDIA



VPO Kachwa, Near Swiss Biotech
KARNAL-132001 (HARYANA) INDIA



info@akshled.com
akshlights033@gmail.com



+91-805 34000 33
+91-895 05050 00
+91-935 01667 30



CUSTOMER CARE NO: +91-805 30000 33



www.akshled.com



Affordable Lighting
from the reputed
name in LED



Smart and
energy efficient



Quality you can trust
You get exactly you
see on the box



Using
BIS Approved
Control Gear



IS 10322
(PART 5/SEC 1): 2012



R-41081019
www.bis.gov.in

